




PROCESS STEAM TURBINES


Increase Reliability and Decrease Maintenance Costs.

Process steam turbines are designed to operate for many years, but can fail prematurely from steam leakage into the bearing housing. To increase MTBR and reliability throughout your operation, specify genuine Inpro/Seal® Bearing Isolators.

Inpro/Seal's Steam Turbine Bearing Isolators easily accommodate temperatures up to 1000°F [537°C]. Their unique design utilizes a deflector rotor and VBXX® interface to permanently protect the bearings from steam leakage.

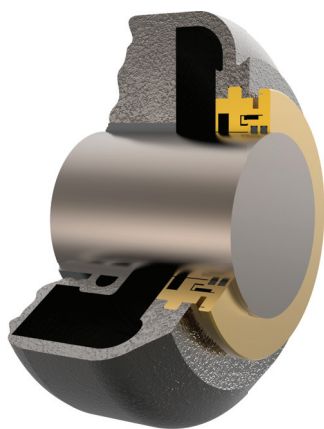


Below 400°F [200°C]

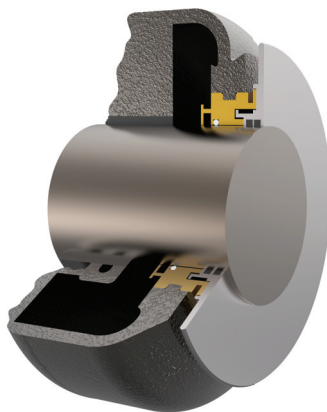

Above 400°F [200°C]

Unscheduled downtime can be costly, but don't worry, Inpro/Seal has you covered. We've streamlined our operation process to offer same day shipments, even on new designs, to get your equipment running right away.

Count on us to improve reliability, increase MTBR, and maximize asset protection and utilization. As the inventor and global leader of Bearing Isolator technology, Inpro/Seal has the knowledge and local sales network to deliver expert engineering and proven results.

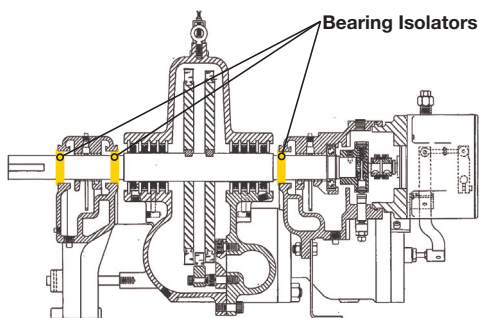

ADVANTAGES

Inpro/Seal Steam Turbine Bearing Isolators:

- Extend life by increasing bearing reliability.
- Permanently protect against steam ingress into the bearing housing.
- Permanently keep lubrication in the bearing housing.
- Accommodates temperatures up to 1000°F [537°C]
- Are custom engineered to meet the requirements of your application.
- Can be shipped the same day your order is placed.



www.inpro-seal.com | info@inpro-seal.com

