

INPRO/SEAL® COMPANY**#1 IN BEARING ISOLATORS**

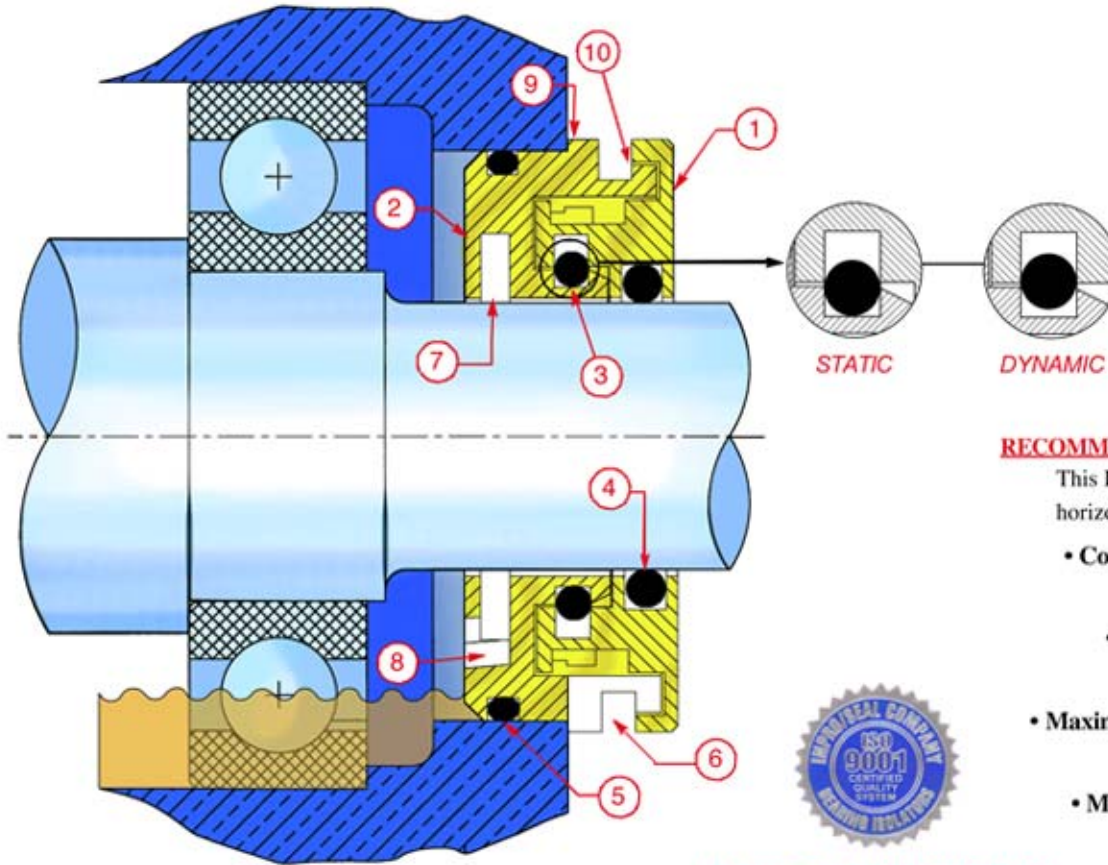
4221-81st Avenue West
 Rock Island, IL 61201
 Ph: 309.787.4971 • 800.447.0524
 Fax: 309.787.6114 • 309.787.6190
 e-mail: info@inpro-seal.com

Visit us on the web: www.inpro-seal.com

INPRO/SEAL®

“VBXX-D”

- 1 ROTOR
- 2 STATOR
- 3 “VBX®” RING
- 4 ROTOR DRIVE RING
- 5 STATOR GASKET
- 6 EXPULSION PORT
- 7 D GROOVE
- 8 LUBE RETURN
- 9 SQUARE SHOULDER
- 10 VBXX INTERFACE

**RECOMMENDED OPERATING CONDITIONS**

This Isolator is designed to operate in a horizontal attitude with a rotating shaft.

- **Continuous Temperature Limit:**
-40 to +400 F
- **Maximum shaft runout:**
0.005" TIR
- **Maximum shaft-to-bore misalignment:**
0.007"
- **Maximum shaft surface speed:**
12,000 ft./min.

SAME DAY SHIPMENTS

#323119 - 10/11/02