


BEARING ISOLATOR REQUEST FOR QUOTE

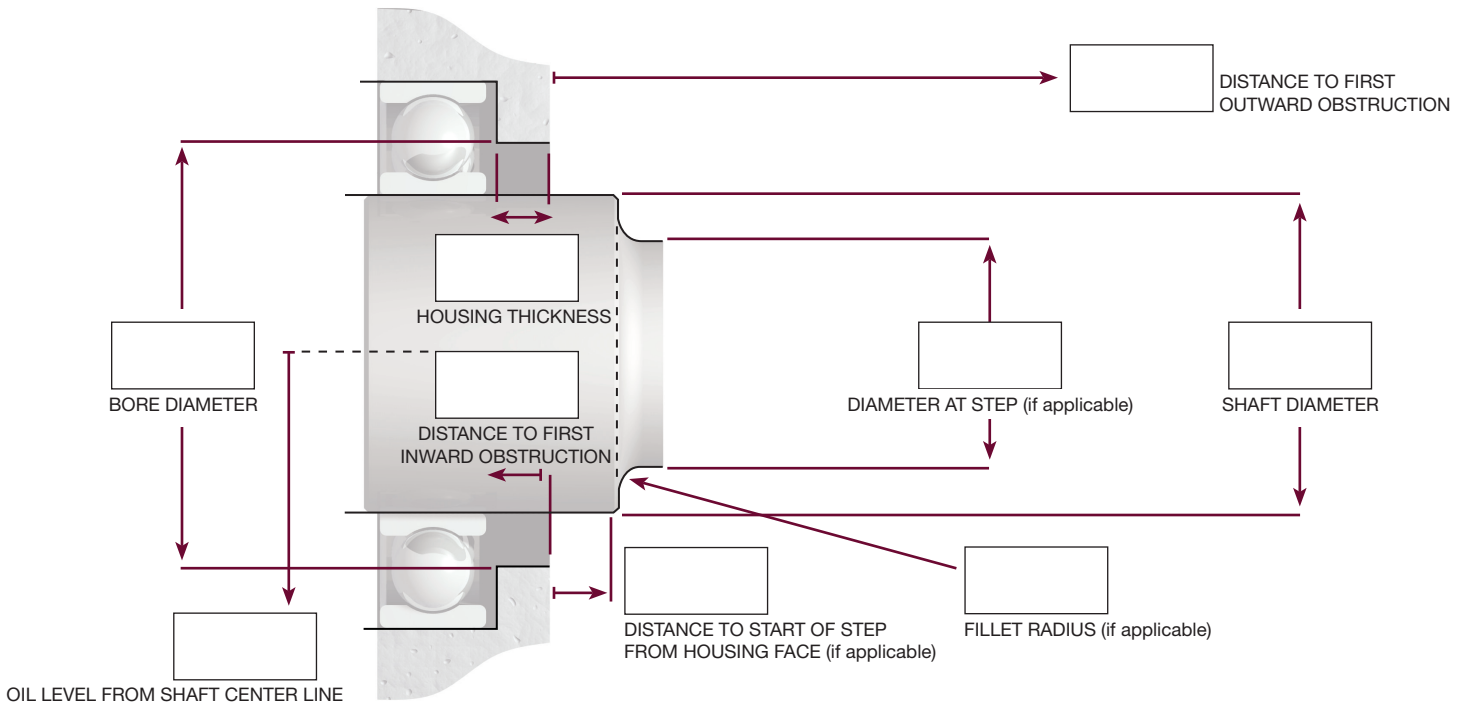

MEASUREMENTS: US Standard (three decimal places) Metric (two decimal places)

Data Needed For Quote

APPLICATION: Pump Motor Other _____

CURRENT SEALING SOLUTION: _____

SHAFT POSITION: Horizontal Vertical Up Vertical Down

BEARING TYPE: Ball Sleeve Roller

MOUNTING: Standard Press-Fit Flange Other _____

PRIMARY FOCUS: Contamination Lube Retention Both

LUBE: Grease Oil Sump Oil Mist Forced Oil System

FIRST OBSTRUCTION: Step Keyway Other _____

AXIAL MOVEMENT: _____

SHAFT SPEED: _____

MISALIGNMENT:

Diametric Run Out > 0.13 mm [0.005 in.] TIR? Yes No

If yes, how much? _____

Shaft To Bore Misalignment > 0.18 mm [0.007 in.] TIR? Yes No

If yes, how much? _____

TEMPERATURE AT SEAL: °C | °F Min _____ Max _____

HOUSING TYPE: Solid Split

SEAL TYPE: Solid Split

SEAL MATERIAL: Bronze Stainless Other _____

CONTACT FOR QUESTIONS: _____

BRIEFLY DESCRIBE THE APPLICATION

Email RFQ to info@inpro-seal.com or your local Inpro/Seal Representative



INPRO/SEAL
a **DOVER** company

EXPERT ENGINEERING. PROVEN RESULTS.